




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 29/06		A2	(11) International Publication Number: WO 99/35800
			(43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/FI99/00004 (22) International Filing Date: 5 January 1999 (05.01.99) (30) Priority Data: 980024 7 January 1998 (07.01.98) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): BERGENWALL, Martin [FI/FI]; Servin Majjan tie 10 A 13, FIN-02150 Espoo (FI). PIRKOLA, Juha [FI/FI]; Pakkamestarinkatu 3 D 137, FIN-00520 Helsinki (FI). (74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER OY; c/o Kolster OY AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>In English translation (filed in Finnish).</i> <i>Without international search report and to be republished</i> <i>upon receipt of that report.</i>	

(54) Title: METHOD OF CONNECTING BASE STATION TO CELLULAR SYSTEM

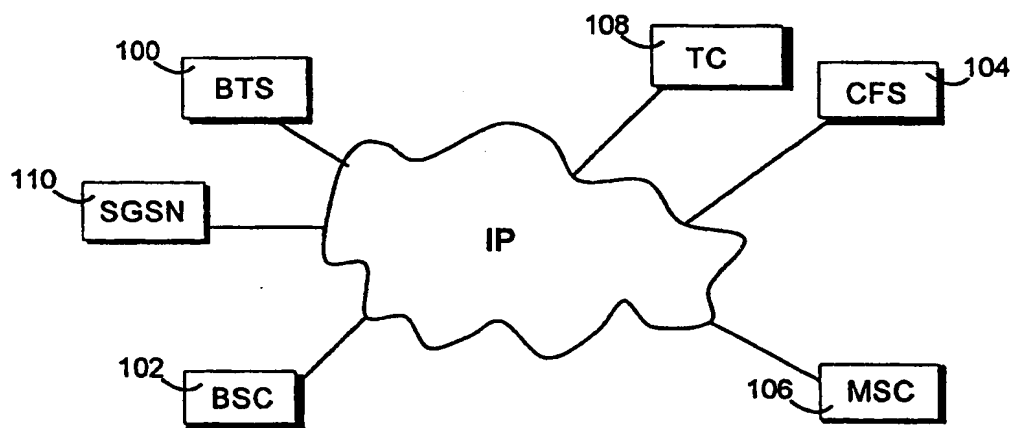

(57) Abstract

The invention relates to a cellular radio network and a method of connecting a base station (100) to a cellular radio system, which enable a fast and automatized installation of base stations wherever an IP information network is available, the cellular radio system comprising a base station system which comprises as network elements a base station controller (102) and at least one base station, and in which method the base station controller controls at least one base station. The invention is characterized in that the network elements (102, 100) are interconnected by an information network using a packet protocol, and that each network element is provided with a unique network element address, and that the network configuration information of said information network using the packet protocol is maintained at a configuration server (104) connected to the information network, and that a new base station connected to the network first contacts the configuration server, and that the configuration server transmits the network configuration information to the base station.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon		Republic of Korea	PT	Portugal		
CN	China	KR	Republic of Korea	RO	Romania		
CU	Cuba	KZ	Kazakstan	RU	Russian Federation		
CZ	Czech Republic	LC	Saint Lucia	SD	Sudan		
DE	Germany	LI	Liechtenstein	SE	Sweden		
DK	Denmark	LK	Sri Lanka	SG	Singapore		
EE	Estonia	LR	Liberia				

METHOD OF CONNECTING BASE STATION TO CELLULAR SYSTEM

FIELD OF THE INVENTION

The invention relates to a cellular radio system comprising a base station system which comprises a base station controller and at least one base station as network elements, and in which cellular radio system the base station controller is arranged to control at least one base station.

The invention further relates to a method of connecting a base station to a cellular radio system comprising a base station system which comprises a base station controller and at least one base station as network elements, and in which method the base station controller controls at least one base station.

BACKGROUND OF THE INVENTION

Demands made upon data transmission systems are on the increase. This concerns particularly wireless digital data transmission systems, such as cellular radio systems, which are expected to produce increasingly complex services, for example various data services.

A typical cellular radio system comprises a fixed base station network in which a subscriber terminal communicates with one or more base stations of the system. Furthermore, the cellular radio system comprises a base station controller which controls the base stations, and a mobile services switching centre. In connection with the cellular radio system, it has been known to connect a plurality of base stations of the cellular radio system so as to enable a plurality of base stations to be controlled by one base station controller by means of telecommunication connections by fixed connections, such as cabling or fixedly installed radio links.

It is previously known that a transmission connection between network elements is typically implemented using a 2Mbit/s connection, i.e. a PCM (Pulse Coded Modulation) link. At worst, the 2 Mbit/s PMC link used by the operator for transmission is so occupied that the increase in capacity mentioned above would require a new PCM link to be introduced. This would be both expensive and difficult.

The prior art solutions allow the number of telecommunication connections between the base stations in a network, i.e. the network configuration, to be manually changed in such a manner that the maintenance personnel visits all base stations to be changed. This is laborious, and such a prior

art system does not enable the structure of the network to be flexibly changed. For example, it is thus impossible to change the transmission capacity of different base stations daily according to the base station which has the heaviest traffic. It would be most desirable that mobile telephone operators in urban and suburban areas should have such a characteristic.

Another disadvantage of the prior art system is that owing to the manual configuration of the network transmission connections, the prior art network is difficult to manage since the network cannot be managed from one point but the base stations have to be separately visited when the network configuration is to be changed.

BRIEF DESCRIPTION OF THE INVENTION

An object of the invention is to provide a cellular radio system so as to solve the problems described above. This can be achieved by a cellular radio system of the type described in the introduction, which is characterized in that in the cellular radio system, the network elements are connected by an information network using a packet protocol.

Another object of the invention is also to provide a method of installing a base station in a cellular radio system so as to solve the above problems. This, again, can be achieved by a method of the type described in the introduction, which is characterized in that the network elements are interconnected by means of an information network using a packet protocol, and that each network element is provided with a unique network element address, and that the network configuration information of said information network using the packet protocol is maintained at a configuration server connected to the information network, and that a new base station connected to the network first contacts the configuration server, and that the configuration server transmits the network configuration information to the base station.

The preferred embodiments of the invention are disclosed in the dependent claims.

Packet switching is a method in which a connection between users is established by transmitting data as packets which, in addition to the actual data, comprise address data and control data. Several connections can use the same transmission connection simultaneously. In recent years, research has been carried out on the use of packet switched radio systems particularly for transmitting data. It is unnecessary to allocate a data transmission connec-

tion for the whole time, only for transmitting packets. This results in considerably lower costs and a smaller capacity need both when a network is being built and used.

The invention is based on the idea that a base station system uses data transmission based on a packet protocol, such as an Internet protocol (IP), and that the base station system comprises autoconfiguring base stations. The system comprises known network elements, such as base stations, base station controllers and a mobile services switching centre, which use an Internet protocol, i.e. an IP information network, and a new network element, i.e. a configuration server. When a new base station is connected to the network, it first contacts the configuration server in order to obtain the network configuration information, i.e. the IP address information of the nearest base station controller and other relevant network elements. The geographical coordinates of the base station can be fed into the base station while it is being installed, whereupon they are transmitted to the configuration server at a stage when the base station is introduced. The configuration server can also directly estimate the location of the base station from its IP address. When the base station has the IP information network address of the nearest base station controller, it can establish O&M (Operation and Maintenance) and signaling connections to the base station controller, which thus starts controlling the base station in a known manner. The base station controller can also utilize the information on the location of the base station in order to allocate radio frequencies to the base station.

Several advantages can be achieved by the cellular radio system and method of installing a base station in a cellular radio system of the invention. The cellular radio system and method of installing a base station in a cellular radio system enable a fast and automatized installation of base stations wherever an IP information network is available. By means of an IP-based autoconfiguring base station, the mobile communication network can be temporarily extended without an actual network extension. This is extremely useful for instance in connection with big concerts, sport events, conferences and other events in which people are congregated in a small area for a relatively short time. An existing IP-based network structure can also be utilized when a new information network is being built. Hence, it can be utilized for cellular network elements.

Furthermore, an advantage of the invention is that a base station becomes quicker and easier to install since the number of procedures that the base station installer must perform can be reduced and automatized. In addition, the base station installer does not have to know the structure of the entire base station network. The system and method of the invention reduce errors and erroneous functions in the base station network.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is now described in closer detail in connection with the preferred embodiments of the invention with reference to the accompanying drawings in which

Figure 1 shows an IP-based cellular radio system with autoconfiguring base stations,

Figures 2a and 2b show by way of example unitdata packets of both speech and data packets, and

Figure 3 shows an IP-based base station system also comprising a network connection to other information networks.

DETAILED DESCRIPTION OF THE INVENTION

The invention will be described below by way of example by means of a GSM network without restricting thereto, however.

Figure 1 shows an IP-based cellular radio system which comprises a base station system (BSS, Base Station Subsystem). As network elements, the base station system comprises a base station controller (BSC) 102 and at least one base station (BTS, Base Transceiver Station) 100. In the cellular radio system, the base station controller 102 is arranged to control at least one base station 100. Most preferably, the information network using a packet protocol is an Internet protocol, i.e. an IP information network, and the network element address is an IP information network address, i.e. an IP number.

The invention is based on the idea that a cellular radio system uses data transmission based on a packet protocol, such as an Internet protocol (IP). In the most preferred embodiment, at least the network elements 100 and 102 of the cellular radio system are connected by an information network using the packet protocol. The operation of the network elements is based on network configuration information and IP address information, in other words each network element has a unique network element address which is attached to packets to be transmitted and on the basis of which the information

is transmitted to the correct network element. For example, the base station 100 needs the IP address information of the nearest base station controller 102 and other relevant network elements in order to be able to communicate with the network elements and both receive and transmit calls. Known network elements of the cellular radio system include the base station 100, the base station controller 102, a mobile services switching centre 106, a speech encoding unit (TC, Transcoder) 108, i.e. a transcoder unit, i.e. a TRAU (Transcoder/Rate Adaptor Unit) unit, and, as a new element in accordance with the invention, a configuration server (CFS) 104. These network elements utilize an Internet protocol, i.e. an IP information network 116.

The mobile services switching centre 106 is equipment which belongs to the mobile communication network and which relays teleconnections in the mobile communication network and, subsequently, to other telephone networks. The mobile services switching centre 106 usually serves to, for example, monitor and control the operation of the base station systems, observe the locations of the mobile stations in the mobile services switching centre area, maintain the connections and transmit them to other information networks, and route the calls. The mobile services switching centre 106 communicates with the base station controller 102, which, again, communicates with the base station. The physical connection of the cellular radio system can vary, in other words information can physically travel via different routes in the network, depending on which route happens to be free at a given moment, but the logical connection is always the IP network, i.e. the Internet protocol network 116. Hence, information always travels logically to the same address, independently of the route via which the information has arrived. The speech encoding unit 108 operates as a coding converter, in other words it encodes and decodes speech.

The base stations 100 of the cellular radio system network elements are autoconfiguring, in other words the functions are carried out automatically by which the system, i.e. the hardware configuration, is extended or downgraded, and different parts are changed and their allocation is identified. Parameters of each base station 100 to be manually set comprise the IP addresses. Such addresses include the unique IP address of the base station 100, the address being dependent on the location of the base station 100, and the geographical coordinates of the base station 100. The geographical coordinates of the base station 100 are transmitted to the base station controller

102 when the base station is being installed. The base station 100 also transmits its geographical coordinates to the configuration server 104 when the base station is put to use or the configuration server 104 determines the location of the base station 100 from the unique IP address of the base station. In the IP networks, a plurality of networks are interconnected. A default gateway is a connection from one network to another, in other words if information is to be transmitted to an element which is not in the same network, the information must first be transmitted to the default gateway which knows how to forward it on the basis of the IP address. The IP address of the configuration server 104 and the IP address of the default gateway are also manually set parameters.

In the cellular radio system of the invention, the unique geographical location of the base station 100 is most preferably determined by means of a satellite location determination system. One such satellite location determination system is a GPS (Global Positioning System) by means of which the geographical coordinates of the base station 100 can be obtained.

The cellular radio system thus comprises the configuration server 104 which is connected to the network elements by the information network using the packet protocol. When the base station 100 is connected to the IP information network 116, it becomes connected to the configuration server 104, whereby the base station 100 obtains necessary network information. Hence, it is the configuration server 104 of the network elements which is responsible for the automatic configuration of the base stations 100. The network information obtained by the base station 100 from the configuration server 104 includes the IP addresses of the mobile services switching centre 106, the base station controller 102 and the speech encoding unit 108.

If the system includes a radio service using a packet transmission, the cellular radio system then also includes a network element (SGSN, Serving GPRS Support Node) 110 of the radio system using the packet transmission. The configuration server 104 also transmits the IP address of this network element to the base station 100. The network element 110 of the radio system using packet transmission is responsible for mobility, signaling and routing data in the radio system.

When the base station 100 has the IP address of the nearest base station controller 102, the base station establishes O&M and signaling connections to the base station controller 102, which next starts controlling the base station 100 in a previously known manner. The signaling connection to

the base station controller 102 exists as long as the base station 100 operates, while the connection between the base station 100 and the configuration server 104 is only a temporary one. The base station 100 transmits its coordinates to the base station controller 102. On the basis of the geographical location information, i.e. the coordinates, the base station controller 102 allocates a free radio channel for the base station 100, in other words allocates radio frequencies to the base station 100. The base station 100 thus contacts the base station controller 102 from which it receives software, radio parameters and network parameters.

Since the Internet protocol does not guarantee the quality of service (QoS), i.e. the combined effect of the parts of a service, which determines user satisfaction, the network has to be provided with a sufficient band width. The base station controller 102 monitors the traffic directed towards the base station 100, and if, in the operation of the base station 100 and on the connections between the network elements 100 and 102, delays occur which are longer than desired, in other words if a packet takes longer than a determined limit allows, for instance in view of call establishment or radio channel usage and various maintenance functions, the base station controller 102 refuses to establish more connections to the base station 100.

Figures 2a and 2b show by way of example unitdata packets of both speech and data packets. The speech and data packets coming from calls are transmitted in a UDP/IP unitdata packet. In the most preferred embodiment, several packets which arrive almost simultaneously can be transmitted in the same UDP/IP packet. The UDP/IP packet comprises an identifier for identifying the connection.

Figure 2a shows an IP header 202, a UDP header 204, which is the identifier of a unitdata-based protocol associated with the TCP/IP protocols, a connection identifier, and a TRAU frame 208 of a GSM packet. The connection identifier 206 indicates to which call or connection the next GSM packet belongs, in other words, in the most preferred embodiment, the connection identifier 206 is a number, i.e. an identifier, which indicates to which call a speech packet belongs. Since a base station 100 is able to transmit several calls simultaneously, each call must be provided with an identifier which indicates to the other end to which call the packet belongs. To enable the packet to arrive at a correct network element in a correct manner, the packet must be provided with an address, i.e. a header. In the most preferred embodiment, the

IP header includes the IP number of a receiver and the IP number of a transmitter. The UDP header, again, is the address of the UDP packet.

Figure 2b shows an IP header 202, a UDP header 204, a connection identifier 206 - 206c and several TRAU frames 208 - 208c of a GSM packet. Several TRAU frames 208 - 208c can be transmitted at once in the GSM packet. Several connection identifiers 206 - 206c, which can be either identical or different within a packet, are thus also necessary. In the most preferred embodiment, a larger amount of information can be transmitted by transmitting several frames simultaneously as the transmission capacity is greater.

Since a common IP network has no data protection, it is necessary to provide some kind of protection or encryption. On connections between a configuration server 104, network elements 100, 102, 108 and 110, and a mobile services switching centre 106 at least some kind of encryption or eavesdropping prevention is used. The connection between the base station 100 and the configuration server 104 must be data-protected. At least some kind of identification must also be used on connections between other network elements. Known encryption methods include a digital signature, the use of a key protocol and encryption, which prevents eavesdropping and enables speech packets to be encrypted.

It is thus previously known that a transmission connection between network elements is implemented using a PCM (Pulse Coded Modulation) link. Since the capacity of PCM links is difficult to increase, in the solution of the invention, an IP network 116 is used on connections between common network elements, such as the base station 100 and the mobile services switching centre 106, in which case the mobile communication network can be temporarily extended without an actual network extension by means of the IP-based autoconfiguring base station 100, and an already existing IP-based network structure can thus be utilized when a new information network is built.

Figure 3 shows an IP-based base station system which comprises network connections 112 and 114 also to other information networks. The base station system is thus a part of a larger entity. All network elements shown in the figure operate as described in connection with Figure 1.

Although the invention is described above with reference to the example and GSM components in accordance with the accompanying drawings, it is obvious that the invention is not restricted thereto but it can be modified in

various ways within the inventive idea disclosed in the attached claims, and the same leading principles can also be applied to other cellular networks, such as next generation networks (Universal Mobile Telecommunications System UMTS being planned) and IMT-2000 (International Mobile Telecommunications 2000).

5

10

15

20

25

30

35

40

45

50

55

60

65

70

75

80

85

90

95

100

105

110

115

120

125

130

135

140

145

150

155

160

165

170

175

180

185

190

195

200

205

210

215

220

225

230

235

240

245

250

255

260

265

270

275

280

285

290

295

300

305

310

315

320

325

330

335

340

345

350

355

360

365

370

375

380

385

390

395

400

405

410

415

420

425

430

435

440

445

450

455

460

465

470

475

480

485

490

495

500

505

510

515

520

525

530

535

540

545

550

555

560

565

570

575

580

585

590

595

600

605

610

615

620

625

630

635

640

645

650

655

660

665

670

675

680

685

690

695

700

705

710

715

720

725

730

735

740

745

750

755

760

765

770

775

780

785

790

795

800

805

810

815

820

825

830

835

840

845

850

855

860

865

870

875

880

885

890

895

900

905

910

915

920

925

930

935

940

945

950

955

960

965

970

975

980

985

990

995

CLAIMS

1. A cellular radio system comprising a base station system which comprises a base station controller (102) and at least one base station (100) as network elements, and in which cellular radio system the base station controller is arranged to control at least one base station,

characterized in that in the cellular radio system, the network elements (100, 102) are connected by an information network using a packet protocol.

2. A cellular radio system as claimed in claim 1, **characterized** in that the cellular radio system comprises a configuration server (104) which is connected to the network elements by the information network using the packet protocol.

3. A cellular radio network as claimed in claim 1, **characterized** in that the cellular radio network comprises as network elements a mobile services switching centre (106), a speech encoding unit (108) and a radio system network element (110) using packet transmission, which are connected to other network elements (100, 102).

4. A cellular radio system as claimed in claim 1, **characterized** in that each network element (100, 102, 106, 108, 110) has a unique network element address which is attached to packets to be transmitted and on the basis of which information is transmitted to the correct network element.

5. A cellular radio system as claimed in claim 4, **characterized** in that the unique network element address of each base station (100), the network element address of the configuration server (104), the unique geographical coordinates of each base station, and the network element address of a default gateway are set in the base station.

6. A cellular radio system as claimed in any one of the preceding claims, **characterized** in that the information network using the packet protocol is an Internet protocol, i.e. an IP information network, and the network element address is an IP information network address, i.e. an IP number.

7. A method of connecting a base station (100) to a cellular radio system comprising a base station system which comprises a base station controller (102) and at least one base station as network elements, and in which method the base station controller controls at least one base station,

characterized in that the network elements (100, 102) are interconnected by means of an information network using a packet protocol, and that each network element is provided with a unique network element address, and that the network configuration information of said information network using the packet protocol is maintained at a configuration server (104) connected to the information network, and that a new base station connected to the network first contacts the configuration server, and that the configuration server transmits the network configuration information to the base station.

8. A method as claimed in claim 7, **characterized** in that the configuration server (104) transmits the network element address of the nearest base station controller (102) to the base station.

9. A method as claimed in claim 7, **characterized** in that the geographical coordinates of the base station (100) are fed into the base station controller (102) at a stage when the base station is installed.

10. A method as claimed in claim 9, **characterized** in that the base station (100) transmits its geographical coordinates to the configuration server (104) at a stage when the base station is introduced.

11. A method as claimed in claim 8, **characterized** in that the configuration server (104) determines the location of the base station (100) from the unique network element address of the base station.

12. A method as claimed in claim 7 or 8, **characterized** in that the base station (100) establishes O&M and signaling connections to the base station controller (102).

13. A method as claimed in claim 9 or 10, **characterized** in that the base station controller (102) uses the geographical location information in order to allocate radio frequencies to the base station.

14. A method as claimed in claim 7, **characterized** in that a mobile services switching centre (106) serves to transmit the connections of the cellular radio system in the information network.

15. A method as claimed in claim 7, **characterized** in that on connections between the configuration server (104), the network elements (100, 102, 108, 110) and the mobile services switching centre (106), at least some kind of encryption or eavesdropping prevention is used.

16. A method as claimed in claim 7, **characterized** in that the base station controller (102) stops contacting the base station (100) if de-

lays that are longer than desired occur on the connections between the network elements (100, 102).

17. A method as claimed in claim 7, **characterized** in that speech and data packets (208) are transmitted as unitdata packets.

5 18. A method as claimed in claim 17, **characterized** in that several speech and data packets which arrive at the same time can be transmitted in the same unitdata packet.

19. A method as claimed in claim 17, **characterized** in that an identifier (206) has been attached to each speech and data packet (208) in
10 order to connect the packet to the correct connection.

20. A method as claimed in any one of claims 7 to 19, **characterized** in that an Internet protocol, i.e. an IP information network, is used as the information network using the packet protocol, an IP information network address, i.e. an IP number, is used as the network element address, and
15 a UDP/IP packet is used as the unitdata packet.

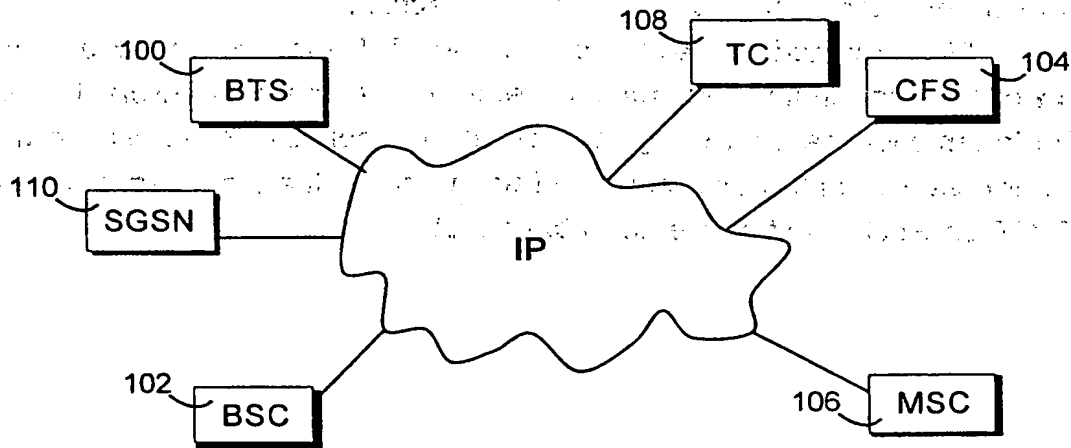


Fig 1

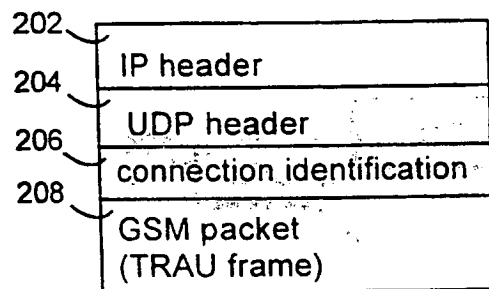


Fig 2a

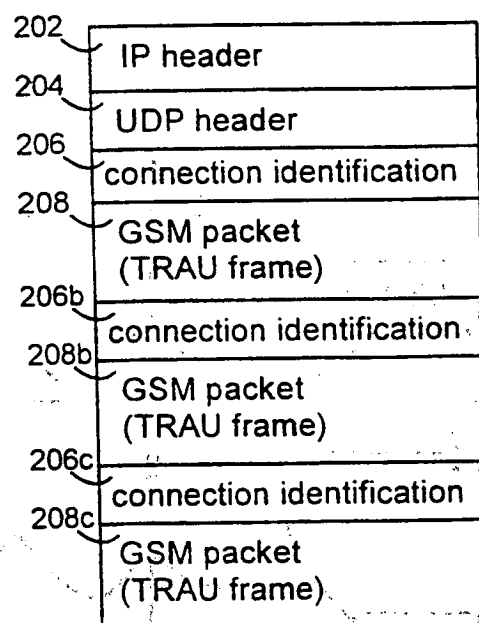


Fig 2b

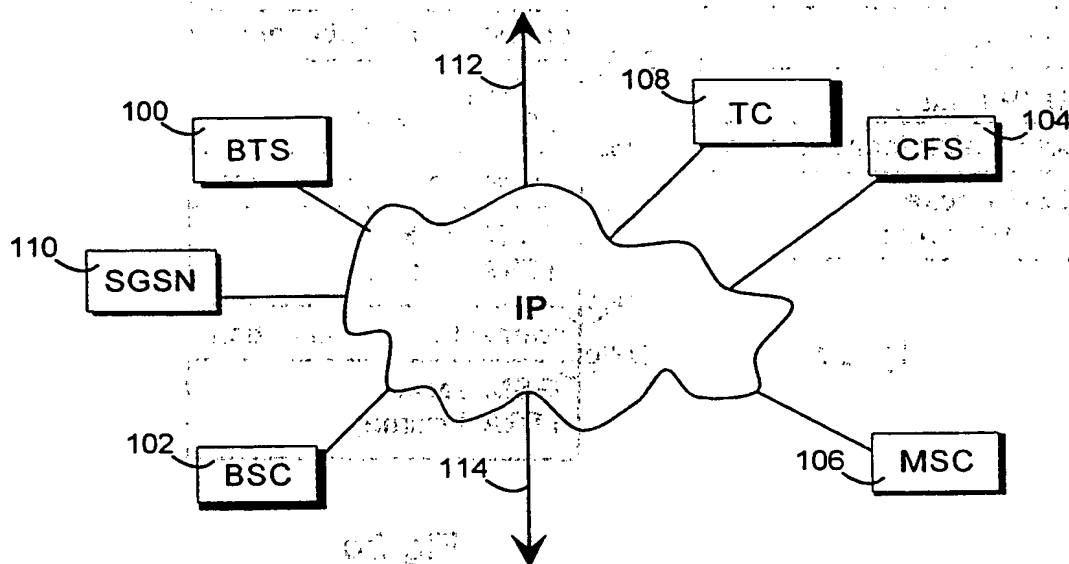


Fig 3

This Page Blank (uspto)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 29/06	A3	(11) International Publication Number: WO 99/35800 (43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/FI99/00004 (22) International Filing Date: 5 January 1999 (05.01.99) (30) Priority Data: 980024 7 January 1998 (07.01.98) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): BERGENWALL, Martin [FI/FI]; Servin Maijan tie 10 A 13, FIN-02150 Espoo (FI). PIRKOLA, Juha [FI/FI]; Pakkamestarinkatu 3 D 137, FIN-00520 Helsinki (FI). (74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER OY; c/o Kolster OY AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Finnish).</i> (88) Date of publication of the international search report: 30 September 1999 (30.09.99)
(54) Title: METHOD OF CONNECTING BASE STATION TO CELLULAR SYSTEM		
<pre> graph LR IP((IP)) --- BTS[100 BTS] IP --- SGSN[110 SGSN] IP --- BSC[102 BSC] IP --- TC[108 TC] IP --- CFS[104 CFS] BSC --- MSC[106 MSC] </pre>		
(57) Abstract <p>The invention relates to a cellular radio network and a method of connecting a base station (100) to a cellular radio system, which enable a fast and automatized installation of base stations wherever an IP information network is available, the cellular radio system comprising a base station system which comprises as network elements a base station controller (102) and at least one base station, and in which method the base station controller controls at least one base station. The invention is characterized in that the network elements (102, 100) are interconnected by an information network using a packet protocol, and that each network element is provided with a unique network element address, and that the network configuration information of said information network using the packet protocol is maintained at a configuration server (104) connected to the information network, and that a new base station connected to the network first contacts the configuration server, and that the configuration server transmits the network configuration information to the base station.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00004

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04L 29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04L, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0426269 A1 (BRITISH TELECOMMUNICATIONS), 8 May 1991 (08.05.91), column 2, line 40 - column 8, line 18	1,3,4,6
Y	--	2,5,7-12, 14-16
X	EP 0578041 A2 (INTERNATIONAL BUSINESS MACHINES CORPORATION), 12 January 1994 (12.01.94), column 2, line 33 - column 4, line 34, abstract	1,3,4,6
Y	--	2,5,7-12, 14-16

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
 - "E" earlier document but published on or after the international filing date
 - "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 - "O" document referring to an oral disclosure, use, exhibition or other means
 - "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

28 June 1999

Date of mailing of the international search report

30 -06- 1999

Name and mailing address of the ISA:

Swedish Patent Office
Box 5055, S-102 42- STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson/MN
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00004

C (Continuation). - DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0793170 A1 (SUN MICROSYSTEMS, INC.), 3 Sept 1997 (03.09.97), figure 2, abstract	2,5,7-12, 14-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/06/99

International application No.

PCT/FI 99/00004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0426269 A1	08/05/91	SE 0426269 T3	
		AT 126646 T	15/09/95
		AU 625703 B	16/07/92
		AU 5477790 A	08/11/90
		CA 2015932 A	03/11/90
		DE 69021685 D,T	08/02/96
		ES 2076310 T	01/11/95
		FI 98685 B,C	15/04/97
		FI 902163 D	00/00/00
		HK 142196 A	09/08/96
		JP 2517697 B	24/07/96
		JP 3205928 A	09/09/91
		US 5168498 A	01/12/92
EP 0578041 A2	12/01/94	CA 2095447 A,C	09/01/94
		JP 2637901 B	06/08/97
		JP 6104926 A	15/04/94
		US 5442633 A	15/08/95
EP 0793170 A1	03/09/97	CN 1168509 A	24/12/97
		JP 10074147 A	17/03/98
		US 5826000 A	20/10/98
		US 5852722 A	22/12/98

Form PCT/ISA/210 (patent family annex) (July 1992)

RECEIVED
U.S. DEPARTMENT OF COMMERCE
BUREAU OF PATENT AND TRADEMARKS
WASHINGTON, D.C. 20530
JAN 10 1964

This Page Blank (uspto)

200-000000	1. Name of the inventor
200-000000	2. Name of the assignor
200-000000	3. Name of the applicant
200-000000	4. Name of the agent
200-000000	5. Name of the examiner
200-000000	6. Name of the supervisor
200-000000	7. Name of the assistant supervisor
200-000000	8. Name of the clerk
200-000000	9. Name of the stenographer
200-000000	10. Name of the typewriter
200-000000	11. Name of the printer
200-000000	12. Name of the binder
200-000000	13. Name of the folder
200-000000	14. Name of the envelope
200-000000	15. Name of the stamp
200-000000	16. Name of the label
200-000000	17. Name of the tag
200-000000	18. Name of the card
200-000000	19. Name of the book
200-000000	20. Name of the pamphlet
200-000000	21. Name of the brochure
200-000000	22. Name of the leaflet
200-000000	23. Name of the flyer
200-000000	24. Name of the poster
200-000000	25. Name of the sign
200-000000	26. Name of the banner
200-000000	27. Name of the flag
200-000000	28. Name of the pennant
200-000000	29. Name of the ribbon
200-000000	30. Name of the cord
200-000000	31. Name of the rope
200-000000	32. Name of the cable
200-000000	33. Name of the wire
200-000000	34. Name of the thread
200-000000	35. Name of the yarn
200-000000	36. Name of the fabric
200-000000	37. Name of the paper
200-000000	38. Name of the ink
200-000000	39. Name of the paint
200-000000	40. Name of the oil
200-000000	41. Name of the grease
200-000000	42. Name of the wax
200-000000	43. Name of the resin
200-000000	44. Name of the glue
200-000000	45. Name of the cement
200-000000	46. Name of the plaster
200-000000	47. Name of the concrete
200-000000	48. Name of the brick
200-000000	49. Name of the tile
200-000000	50. Name of the stone
200-000000	51. Name of the wood
200-000000	52. Name of the metal
200-000000	53. Name of the glass
200-000000	54. Name of the plastic
200-000000	55. Name of the rubber
200-000000	56. Name of the leather
200-000000	57. Name of the fur
200-000000	58. Name of the silk
200-000000	59. Name of the cotton
200-000000	60. Name of the wool
200-000000	61. Name of the hair
200-000000	62. Name of the bone
200-000000	63. Name of the shell
200-000000	64. Name of the horn
200-000000	65. Name of the ivory
200-000000	66. Name of the pearl
200-000000	67. Name of the diamond
200-000000	68. Name of the ruby
200-000000	69. Name of the sapphire
200-000000	70. Name of the emerald
200-000000	71. Name of the opal
200-000000	72. Name of the garnet
200-000000	73. Name of the topaz
200-000000	74. Name of the zircon
200-000000	75. Name of the quartz
200-000000	76. Name of the amethyst
200-000000	77. Name of the tourmaline
200-000000	78. Name of the alexandrite
200-000000	79. Name of the cat's paw
200-000000	80. Name of the bloodstone
200-000000	81. Name of the jasper
200-000000	82. Name of the malachite
200-000000	83. Name of the turquoise
200-000000	84. Name of the lapis lazuli
200-000000	85. Name of the obsidian
200-000000	86. Name of the agate
200-000000	87. Name of the onyx
200-000000	88. Name of the nephrite
200-000000	89. Name of the jade
200-000000	90. Name of the malachite
200-000000	91. Name of the turquoise
200-000000	92. Name of the lapis lazuli
200-000000	93. Name of the obsidian
200-000000	94. Name of the agate
200-000000	95. Name of the onyx
200-000000	96. Name of the nephrite
200-000000	97. Name of the jade
200-000000	98. Name of the malachite
200-000000	99. Name of the turquoise
200-000000	100. Name of the lapis lazuli